

Alpine FRESH


RP Series Specification Sheet

Cold Water Reservoir

- Stainless steel tank
- 1.8L Capacity
- Chilling Capacity of 5L per hour

Hot Water Reservoir

- Stainless steel tank
- Fitted with "wrap around" heating element
- Fitted with two thermostats for reliability and accuracy of water temp
- Approx 65 cups per hour at plus 85°C

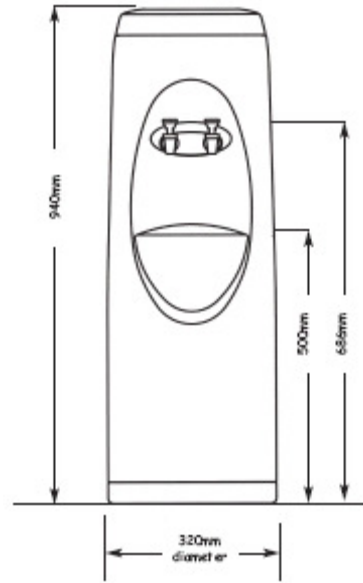

Refrigeration

- Uses 40gms of refrigerant R134A which is non-toxic, non-flammable and environmentally friendly
- Refrigerant flow is controlled by a capillary tube which has no moving parts

Temperature Control

- The thermostat is factory pre-set

Compressors

- 1/16 hp capacity
- 49 Watts
- Hermetically sealed for silent running

Condenser

- Static condenser is fabricated from steel tube and wire

Electrical

- 240 volts, 50 Hz
- 2m house cable and 3 pin plug is supplied

Performance to ARI 1010-94 Standard

- Inlet water - 26.7°C
- Outlet water - 10°C
- Ambient air - 32.2°C

Weight - Packed

- Cold/Cool Units - 15kg
- Hot/Cold Units - 16kg

Dimensions

- Width - 370mm
- Depth - 370mm
- Cubic - 950mm

Note

- All units are fitted with a dust seal and air filter to maintain water quality

Unique Float Valve Assembly

- Primary Float - shuts water off when the level reaches approximately 6cm from the top of the bowl
- Secondary Float - this safety float will stop water overflow should the primary valve fail